


TERA® 600 MHz F/FTP CABLE

Part of the 10G *ip*™ cabling solution Siemon's TERA 600 MHz F/FTP cable perfectly complements the performance of our TERA outlets. Siemon cable exceeds all TIA/EIA and ISO/IEC requirements for category 7/class F transmission performance. Utilizing Siemon cable is the ideal way to ensure optimum channel performance and is essential for a complete end-to-end warranted system. The TERA 600 MHz F/FTP cable is compatible with both TERA outlets and 10G 6A™ F/UTP MAX® modules.




10G *ip*™

CABLE — INTERNATIONAL

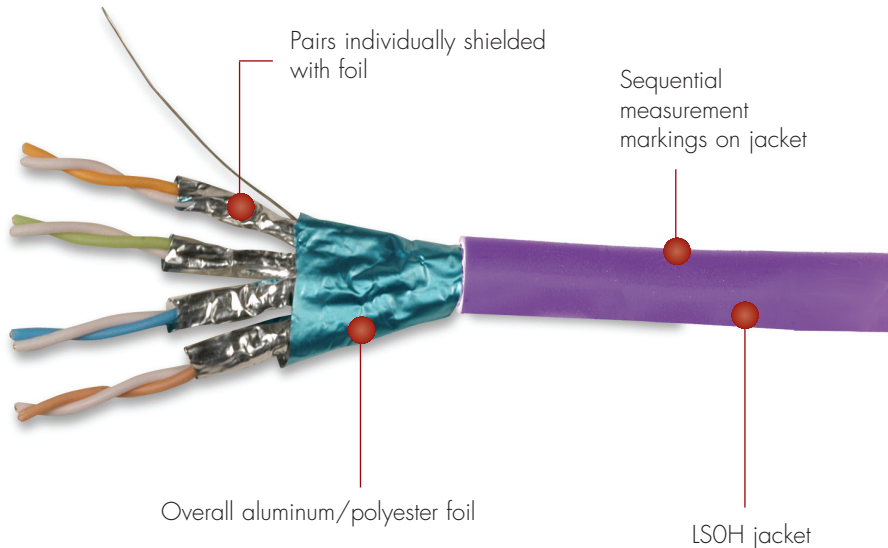

Cable Construction

- F/FTP
- 0.57mm (0.023 in.) solid bare copper
- 8.4mm (0.33 in.) max jacket diameter
- Pairs individually shielded with aluminum-polyester foil
- Overall aluminum/polyester foil tape

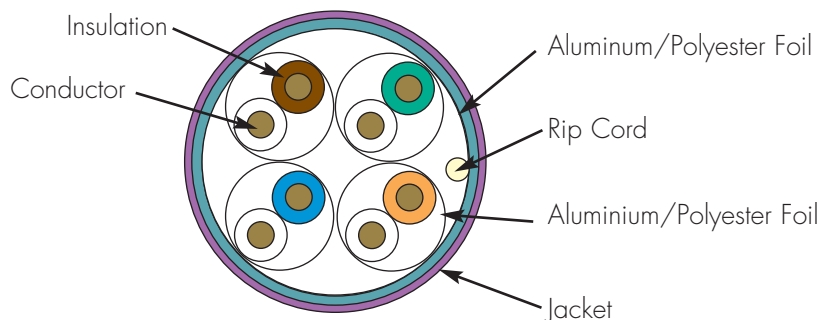

Compliance

- ISO/IEC 11801:2002 category 7
- IEC 61156-5:2002 category 7
- LSOH: IEC 60332-1, IEC 60754, and IEC 61034

CONNECTING THE WORLD TO A HIGHER STANDARD

WWW.SIEMON.COM



PRODUCT INFORMATION



ELECTRICAL SPECIFICATIONS

DC Resistance	<17.0 Ω /100m
DC Resistance Unbalance	2%
Mutual Capacitance	5.6 nF/100m
Capacitance Unbalance	<330 pF/100m
Characteristic Impedance (ohms)	1-100 MHz: 100 $\pm$ 15% 100-250 MHz: 100 $\pm$ 22% 250-600 MHz: 100 $\pm$ 22%
NVP	80%
LCL	40-10 x log(f/dB
Delay Skew	$\leq$ 20ns

PHYSICAL PROPERTIES

	LSOH
Pulling Tension (max)	110N
Bend Radius (min)	50mm
Installation Temperature	0 to 60°C
Storage Temperature	-20 to 75°C
Operating Temperature	-20 to 60°C

TRANSMISSION PERFORMANCE

IEC 61156-5

SIEMON TYPICAL


Frequency (MHz)	Insertion Loss (dB)		NEXT (dB)		PS NEXT (dB)		ACR (dB)		PSACR (dB)		ACR-F (dB)		PS ACR-F (dB)		Return Loss (dB)		Propagation Delay (ns)	
1.0*	2.0	1.7	78.0	100.0	75.0	97.0	76.0	98.3	73.0	95.3	78.0	90.0	75.0	87.0	20.0	30.0	570	492
4.0	3.7	3.4	78.0	100.0	75.0	97.0	74.3	96.6	71.3	93.6	78.0	90.0	75.0	87.0	23.0	33.0	552	474
10.0	5.9	5.0	78.0	100.0	75.0	97.0	72.1	95.0	69.1	92.0	74.0	90.0	71.0	87.0	25.0	35.0	545	467
16.0	7.4	6.4	78.0	100.0	75.0	97.0	70.6	93.6	67.6	90.6	69.9	90.0	66.9	87.0	25.0	35.0	543	465
20.0	8.3	7.1	78.0	100.0	75.0	97.0	69.7	92.9	66.7	89.9	68.0	90.0	65.0	87.0	25.0	35.0	542	464
31.25	10.4	9.0	78.0	100.0	75.0	97.0	67.6	91.0	64.6	88.0	64.1	90.0	61.1	87.0	23.6	33.6	540	462
62.5	14.9	13.0	75.5	100.0	72.5	97.0	60.6	87.0	57.6	84.0	58.1	85.0	55.1	82.0	21.5	31.5	539	461
100.0	19.0	16.8	72.4	98.0	69.4	95.0	53.4	81.2	50.4	78.2	54.0	81.0	51.0	78.0	20.1	30.1	538	460
200.0	27.5	23.9	67.9	93.0	64.9	90.0	40.4	69.1	37.4	66.1	48.0	77.0	45.0	74.0	18.0	28.0	537	459
250.0	31.0	28.5	66.4	92.1	63.4	89.1	35.5	63.6	32.5	60.6	46.0	76.0	43.0	73.0	17.3	27.3	536	458
300.0	34.2	29.2	65.2	91.0	62.2	88.0	31.1	61.8	28.1	58.8	44.5	71.0	41.5	68.0	17.3	27.3	536	458
350.0	37.2	31.8	64.2	90.3	61.2	87.3	27.1	58.5	24.1	55.5	43.1	69.0	40.1	66.0	17.3	27.3	536	458
400.0	40.0	33.4	63.4	89.1	60.4	86.1	23.4	55.7	20.4	52.7	42.0	68.1	39.0	65.1	17.3	27.3	536	458
550.0	47.7	37.2	61.3	87.3	58.3	84.3	13.6	50.1	10.6	47.1	39.2	66.2	36.2	63.1	17.3	27.3	536	458
600.0	50.1	42.5	60.7	86.1	57.7	83.1	10.6	43.6	7.6	40.6	38.4	60.0	35.4	57.0	17.3	27.3	536	458

*Values below 4 MHz are informational only.

All performance based on 100 meters (328 ft.).

TERA® 600 MHz 4-Pair Solid F/FTP Cable:

- 9N7L4-E6LSOH (IEC 60332-1), Violet Jacket, 305m (1000 Ft.)
 9N7L4-E6-5CRLSOH (IEC 60332-1), Violet Jacket, 500m (1640 ft.)
 9N7L4-E6-1KRLSOH (IEC 60332-1), Violet Jacket, 1000m (3281 ft.)

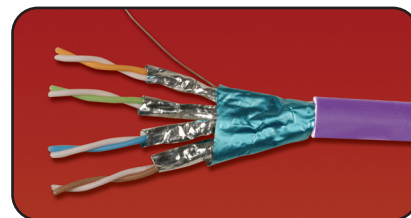

9N7L4-E6

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

TERA® is a trademark of Siemon

For related product information request Spec Sheet(s):

- TERA Outlets (PROD-SS-TRAO)
 TERA Patch Panels (PROD-SS-TRAPP)
 TERA Patch Cords (PROD-SS-TRAPC)
 TERA S/FTP Trunking Cable Assemblies (PROD-SS-TRATC)

The Americas

Watertown, CT USA
 Phone (1) 860 945 4200

Europe/Middle East/Africa

Surrey, England
 Phone (44) 0 1932 571771

Asia/Pacific

Shanghai, P.R. China
 Phone (86) 21 6390 6778

Japan

Tokyo, Japan
 Phone (03) 5405 7650

WWW.SIEMON.COM

ISO 9001
 CERTIFIED

ISO 14001
 CERTIFIED

